△ ® CB(€




40W Single Output Switching Power Supply





- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Class 2 power unit
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and moving sign applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet location
- 7 years warranty (Note.10)



A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

M SELV IP65 IP67 R (for 48V,54V only) C US (except for 48V,54V)

- B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance
- D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.


SDECIEIC ATION

PECIFIC	ATION	III C 40II 42 🗆	III.C 40II.45 🗆	III C 40II 20 🗆	III C 40II 24 🗆	III C 40II 20 🗆	III C 40II 20	III C 40II 40	III C 40II 40 🗆	III C 40II 54			
MODEL	T]		HLG-40H-20	HLG-40H-24	HLG-40H-30	HLG-40H-36	HLG-40H-42	HLG-40H-48	HLG-40H-54			
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V			
	CONSTANT CURRENT REGION Note.4		9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V			
	RATED CURRENT	3.33A	2.67A	2A	1.67A	1.34A	1.12A	0.96A	0.84A	0.75A			
	RATED POWER	39.96W	40.05W	40W	40.08W	40.2W	40.32W	40.32W	40.32W	40.5W			
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	300mVp-p	300mVp-p			
	VOLTAGE ADJ. RANGE Note.6	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	40 ~ 46V	44 ~ 53V	49 ~ 58V			
DUTPUT	OUDDENT AD L DANGE	Can be adjust	ed by internal p	ootentiometer A	A type only								
	CURRENT ADJ. RANGE	2 ~ 3.33A	1.6 ~ 2.67A	1.2 ~ 2A	1 ~ 1.67A	0.8 ~ 1.34A	0.67 ~ 1.12A	0.58 ~ 0.96A	0.5 ~ 0.84A	0.45 ~ 0.75			
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%			
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	SETUP, RISE TIME Note.8	500ms, 80ms	at full load	230VAC / 115	VAC								
	HOLD UP TIME (Typ.)	16ms/230VA		15VAC at full I									
		90 ~ 305VAC	127 ~ 431										
	FREQUENCY RANGE	47 ~ 63Hz	121 10	1100									
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.92/277VAC at full load (Please refer to "Power Factor Characteristic" curve)											
				ading≧60% a		•				<u>e)</u>			
NDUT	TOTAL HARMONIC DISTORTION		<u> </u>							00.50/			
NPUT	EFFICIENCY (Typ.)	86.5%	86.5%	88%	88%	88.5%	88.5%	88.5%	89.5%	89.5%			
	AC CURRENT (Typ.)	0.43A / 115VA			0.23A / 277VA								
	INRUSH CURRENT(Typ.)	COLD STAR	COLD START 50A(twidth=210μs measured at 50% lpeak) at 230VAC										
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	12 units (circuit breaker of type B) / 20 units (circuit breaker of type C) at 230VAC											
	LEAKAGE CURRENT	<0.75mA / 277VAC											
	OVER CURRENT Note.4	95~108%											
		Protection type: Constant current limiting, recovers automatically after fault condition is removed											
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed											
PROTECTION	OVER VOLTAGE	15 ~ 21V	18 ~ 24V	23 ~ 30V	28 ~ 35V	35 ~ 43V	41 ~ 49V	48 ~ 58V	54 ~ 65V	59 ~ 68V			
		Protection typ	e : Shut down	o/p voltage, re-	power on to re	cover							
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover											
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")											
		`	non-condensir										
FNI//BONNENT	WORKING HUMIDITY			ig									
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH											
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 60°C) 10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes											
	VIBRATION												
	SAFETY STANDARDS Note.7	UL8750(type	"HL"), CSA C	22.2 No. 250.	0-08 (except t	or 48V, 54V),	EN61347-1, E	N61347-2-13	independent,	IP65 or IP6			
	ON ETTOTALDARDO NOIC.	J61347-1, J61347-2-13 approved ; design refer to UL60950-1, TUV EN60950-1, EN60335-1											
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75	KVAC I/P-F	G:2KVAC O/	P-FG:1.5KVA	С							
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-F	G, O/P-FG:10	00M Ohms / 50	0VDC / 25°C/	70% RH							
	EMC EMISSION	Compliance to	EN55015, EN	161000-3-2 Cla	ass C (≧60% lo	ad) ; EN61000	-3-3						
	EMC IMMUNITY	Compliance to EN55015, EN61000-3-2 Class C (≧60% load); EN61000-3-3 Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, EN55024, light industry level (surge 4KV), criteria A											
	MTBF	336.5Khrs min. MIL-HDBK-217F (25°C)											
OTHERS													
	PACKING		:/15.6Kg/0.8Cl	JFT									
NOTE	All parameters NOT speciall Ripple & noise are measure Tolerance: includes set up Please refer to "DRIVING Derating may be needed un A type only. Safety and EMC design refe Length of set up time is mea The power supply is conside	y mentioned a d at 20MHz of tolerance, line METHODS C der low input ver to EN60598-asured at cold	re measured a bandwidth by regulation and F LED MODU oltages. Pleas 1, CNS15233, first start. Turn	tt 230VAC inpuusing a 12" tw load regulation JLE". e check the sta GB7000.1, FC ing ON/OFF th	isted pair-wire atic characteris comparting compart	terminated wit	h a 0.1uf & 47 letails. increase of the	uf parallel capa					


- 9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.
- 10. Refer to warranty statement. 11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently

connected to the mains



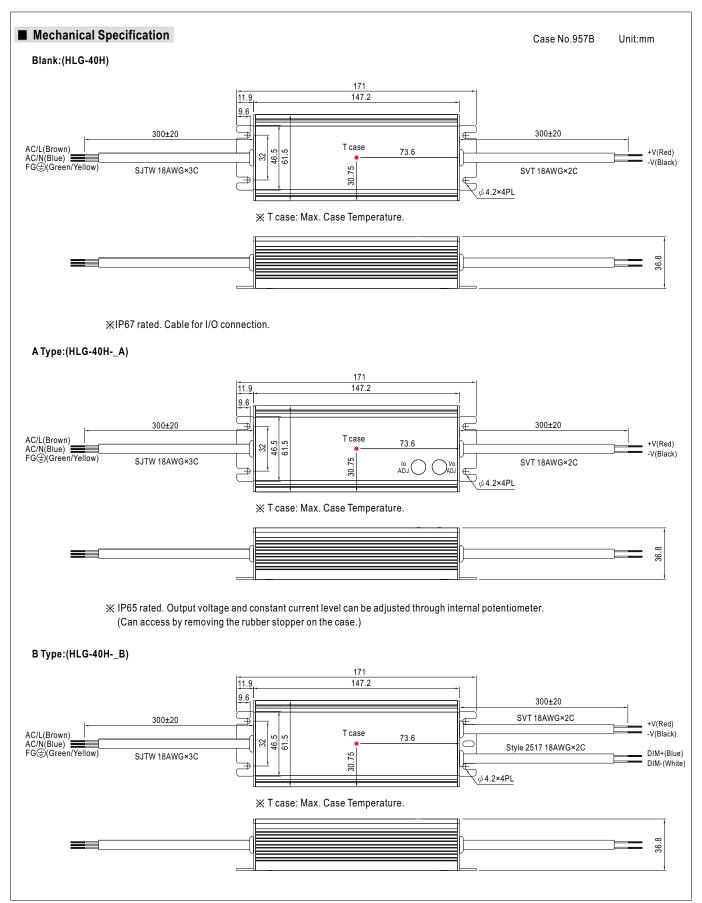




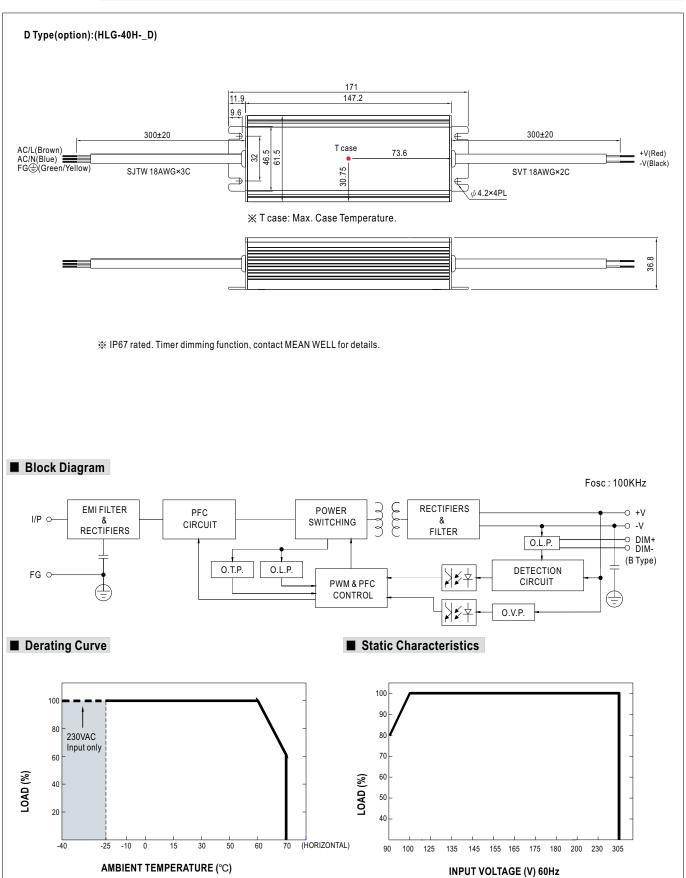




■ Power Factor Characteristic

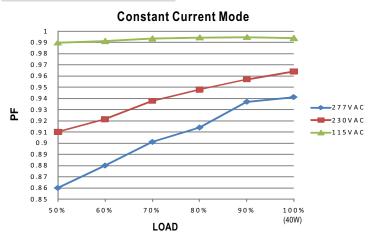

■ EFFICIENCY vs LOAD (48V Model)

HLG-40H series possess superior working efficiency that up to 89.5% can be reached in field applications.

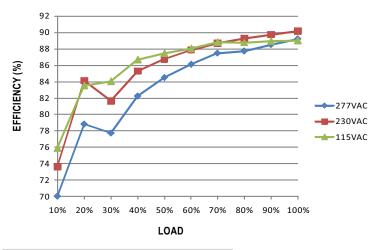


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

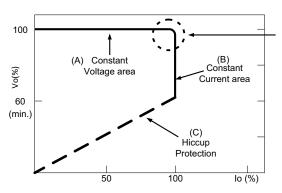


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



■ DIMMING OPERATION (for B-type only)

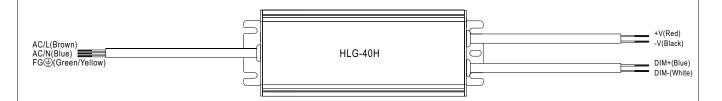

- ※ Please DO NOT connect "DIM-" to "-V".
- * Reference resistance value for output current adjustment (Typical)

Resistance	Single driver	10ΚΩ	20ΚΩ	30ΚΩ	40ΚΩ	50ΚΩ	60ΚΩ	70ΚΩ	80ΚΩ	90ΚΩ	100ΚΩ	OPEN
value	Multiple drivers	10KΩ/N	20KΩ/N	30KΩ/N	40KΩ/N	50KG/N	60KΩ/N	70KΩ/N	80KΩ/N	90KΩ/N	100KΩ/N	
Percentage	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

¾ 1 ~ 10V dimming function for output current adjustment (Typical)


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

¾ 10V PWM signal for output current adjustment (Typical): Frequency range: 100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

- **Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.
- $\label{eq:connecting} \mbox{\@scalebase}\xspace}\xspace{\@scalebase}\xspace{\@scalebase}\xspace{\@scalebase}\xspace}\xspace{\@scalebase}\xspace{\@scalebase}\xspace{\@scalebase}\xspace}\xspace{\@scalebase}\xspace{\@scalebase}\xspace{\@scalebase}\xspace}\xspace{\@scalebase}\xspace(x)$

Dimming connection diagram for turning the lighting fixture ON/OFF:

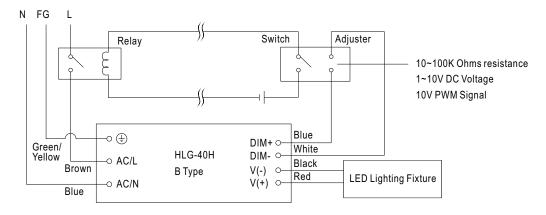

Using a switch and relay can turn ON/OFF the lighting fixture.


- 1.Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.



■ WATERPROOF CONNECTION


Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-40H to operate in dry/wet/damp or outdoor environment.



Size	Pin Configuration (Female					
M12	000	000				
IVI I Z	4-PIN	5-PIN				
	5A/PIN	5A/PIN				
Order No.	M12-04	M12-05				
Suitable Current	10A max.	10A max.				

Size	Pin Configuration (Female)				
M15	00				
IVITO	2-PIN				
	12A/PIN				
Order No.	M15-02				
Suitable Current	12A max.				



O Cable Joiner

